

## Features

- 24 V output, 400 W
- 100 to 264 VAC, 1 phase, 50-400 Hz
- Designed to meet MIL-STD-704
- Efficiency >86%
- Ripple 1% Vout max (pk-pk)
- Regulation 5%, line and load
- Isolated



Actual appearance may vary to that shown above.

## Brief Description

This enclosed AC-DC power supply is designed to meet inhabited environments. It complies with the input voltage requirements of MIL-STD-704 and has a hold-up time of 50 msec. It typically weighs 6.75 lbs.

## Environment

Temperature: -40°C to +71°C operating  
 -40°C to +85°C non-operating  
 Vibration: MIL-STD-202G, NAVMAT P-9492  
 Shock: MIL-STD-202, Method 213, Test Cond J  
 EMI: MIL-STD-461 CE101, CE102

## Input Voltage

100 to 264 VAC, 1 phase, 50-400 Hz


## Output Voltage, Currents, and/or Power

24 V at 400 W

## Note:

1) Full load operation is guaranteed up to +75°C baseplate temperature.

## Outline Drawing

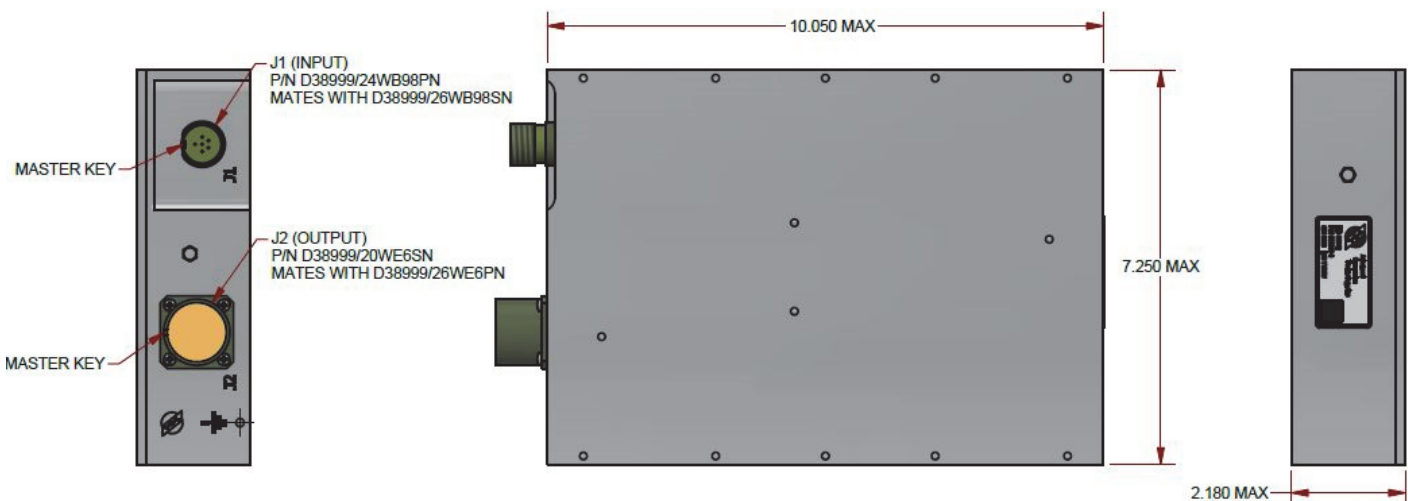

**Size:** 10.05 x 7.25 x 2.18 in

**Connectors:** Input (J1): D38999/24WB98PN, Output (J2): D38999/20WE6SN

For additional details, please contact ACT at (717) 939-2300 or [salesinfo@actpower.com](mailto:salesinfo@actpower.com)

© 2020 All Rights Reserved, Specifications subject to change without notice

2001 Fulling Mill Road • Middletown PA 17057 • 717 939-2300 • F: 717 939-7170 • [www.actpower.com](http://www.actpower.com)

