



# Advanced Conversion Technology, Inc.


## MULTIPLE OUTPUT DC/DC POWER SUPPLY SR - 1737B

This DC/DC power supply converts +270VDC into multiple DC output voltages. The rugged plug-in design allows for easy access and replaceability. Mounting and heat transfer occurs through the power supplies rails using two wedgelock screws.



### FEATURES

- Multiple Versions
- Up to 6 Outputs
- 170 watts of Output Power
- BIT Indicator
- I/O Controls
- Blindmate

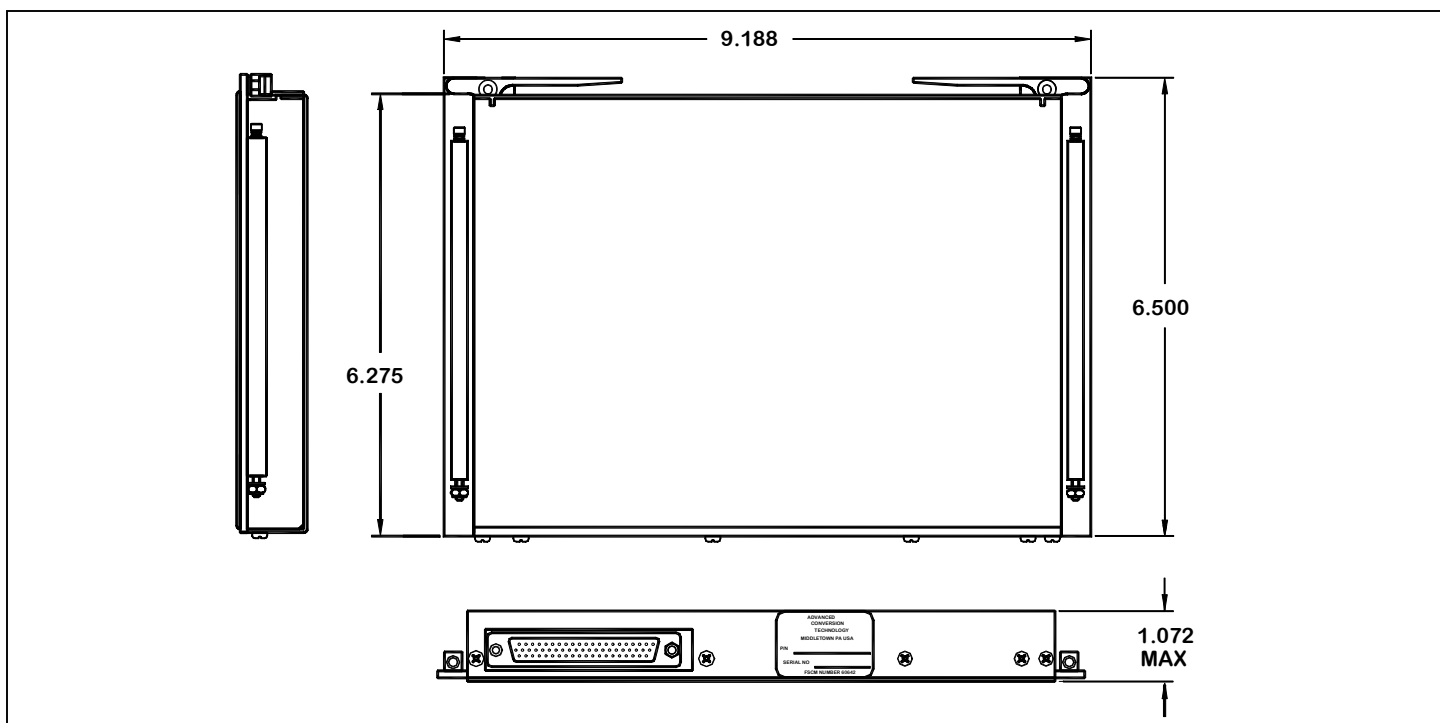

### ELECTRICAL CHARACTERISTICS

**Input Voltage:** +270 VDC

**Outputs:**

Version #1

- +5.1VDC @ 4 amps
- 5.1VDC @ 1.7 amps
- +10.5VDC @ 0.1 amps
- 10.5VDC @ 0.1 amps
- +15VDC @ 0.1 amps
- 15VDC @ 0.1 amps

Version #2

- +12VDC @ 5.0 amps
- +15VDC @ 5.0 amps
- 12VDC @ 0.5 amps
- 15VDC @ 2.0 amps

**Environmental Conditions:**

Operating Temperature: -40 to +72°C

Specifications subject to change without notice

Copyright 2002, All Rights Reserved: 2001 Fulling Mill Rd, Middletown, PA 17057

Phone: (717) 939-2300 Fax: (717) 939-7170 Website: [www.actpower.com](http://www.actpower.com) E-mail: [mail@actpower.com](mailto:mail@actpower.com)